


BANNER FINISHING

Reference Guide


Use this guide to choose the finishing options best suited to your application

Key considerations for tear resistance are banner-tensioning and distribution of stress-load




Grommets

Popular for speed and economy, grommets are less-than-ideal for use in high wind locations where even distribution of stress-load is critical.(see "Webbing & D-rings")

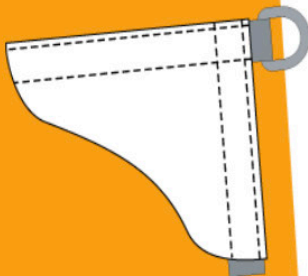


Webbing & D-rings

Webbing (AKA "seat belt"), is used to reinforce hems and help distribute stress-load. Webbing can be used with grommets or (better) D-rings, for improved performance.

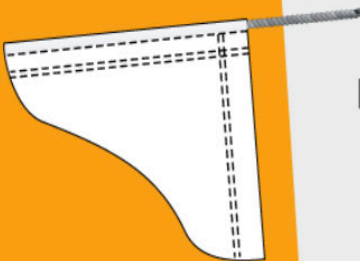

Rope

1/4" rope or aircraft cable sewn into the hem is ideal for use in banners spanning roadways, etc.

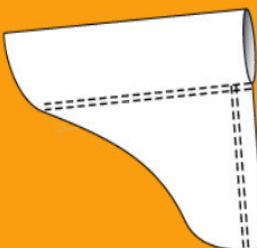

Pockets

Suited for use with dowels, poles, flat bar or tubing commonly used in tensioning systems. Pockets can be sewn, sealed or lined for added strength.